

# ***Hibertek***

International

Thin Mini-ITX All-In-One

T Series Production Introduction  
23", 21.5", 19.5"

# Unique Features



- Multi-Touch on 19.5", 21.5", 23" (Optional)
- High Performance i7/i5 Desktop CPU
- Battery (Optional)
- Internal Power or Adaptor
- 1080p Camera & Dual Array MIC
- COM, TPM, Chassis Intrusion
- VESA for Wall Mount
- 3-WAY Rotation High Adjustable Stand (Optional)

# CONTENTS

I. Ultimate Thin Mini-ITX AIO

II. Aesthetic ID

III. Professional & Reliable Design

IV. Easy Assembly

V. Flexible Configuration

VI. Thin Mini-ITX Motherboard

VII. SPEC

VIII. Appendix



T23 & T22 & T20

True Artwork - One Breathtaking Slim Body



Beautiful & Clean  
Back Cover





EDGE  
1.4CM

WHOLE THICKNESS  
5.5CM

Art craft Design for Space-saving Usage



Optional: Anti-Glare Panel or Glass Cover

Frameless Bezel Design with Capacitive Multi-Touch Screen



\* USB2.0 / **USB3.0**

\* USB2.0 / **USB3.0**

\* 4in1 Card Reader

\* *Monitor Off*

\* *Brightness up*

\* *Brightness Down*

\* *Power Button*

## Multi-Function Design

- Expansion IO ports on Hand Side
- Meet the Tender SPEC for Side IO with more USB ports/ Card Reader
- Anti-Flicker Power LED on Side Bar
- Unique Monitor Off Function (Turn off the Monitor while AIO PC is still working)






## Integrated front Speakers

Stereo Sound Experience

2 x 3W High Quality Speaker

Optional:  
1080P Camera / 720P Camera  
Single MIC  
Dual DMIC (Support Noise Cancellation)

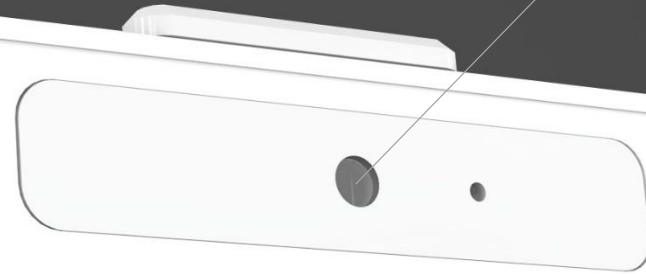


2.0  
Mega pixel

Sensitive  
Micro-Phone

# Internal Power Board

Support 120W/90W/60W Internal Power Board

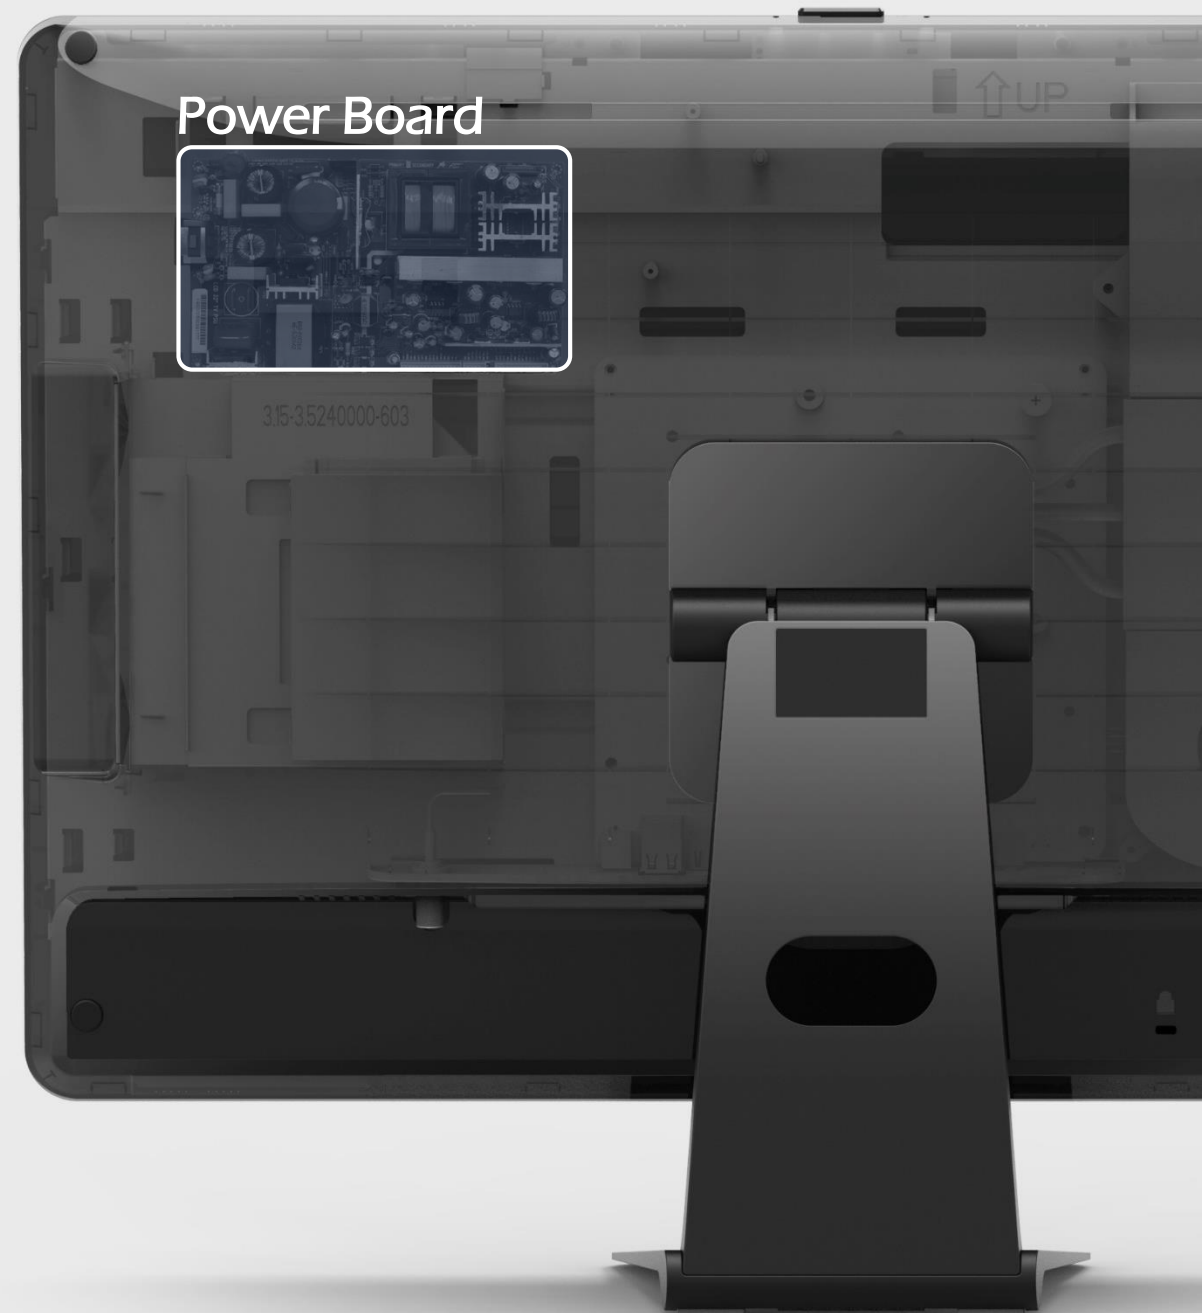



## Internal Battery

Support 30 Mins Battery Life

- Intel Desktop i7/i5/i3 CPU
- Touch Optional



Customized-able Tray

Smart Card Reader Tray  
External HDD Tray





Add more port as you wish



COM port  
(Optional)





# KVM

## Dual system in one PC

Completely isolate Intranet and Extranet.


Level up system Hardware security.

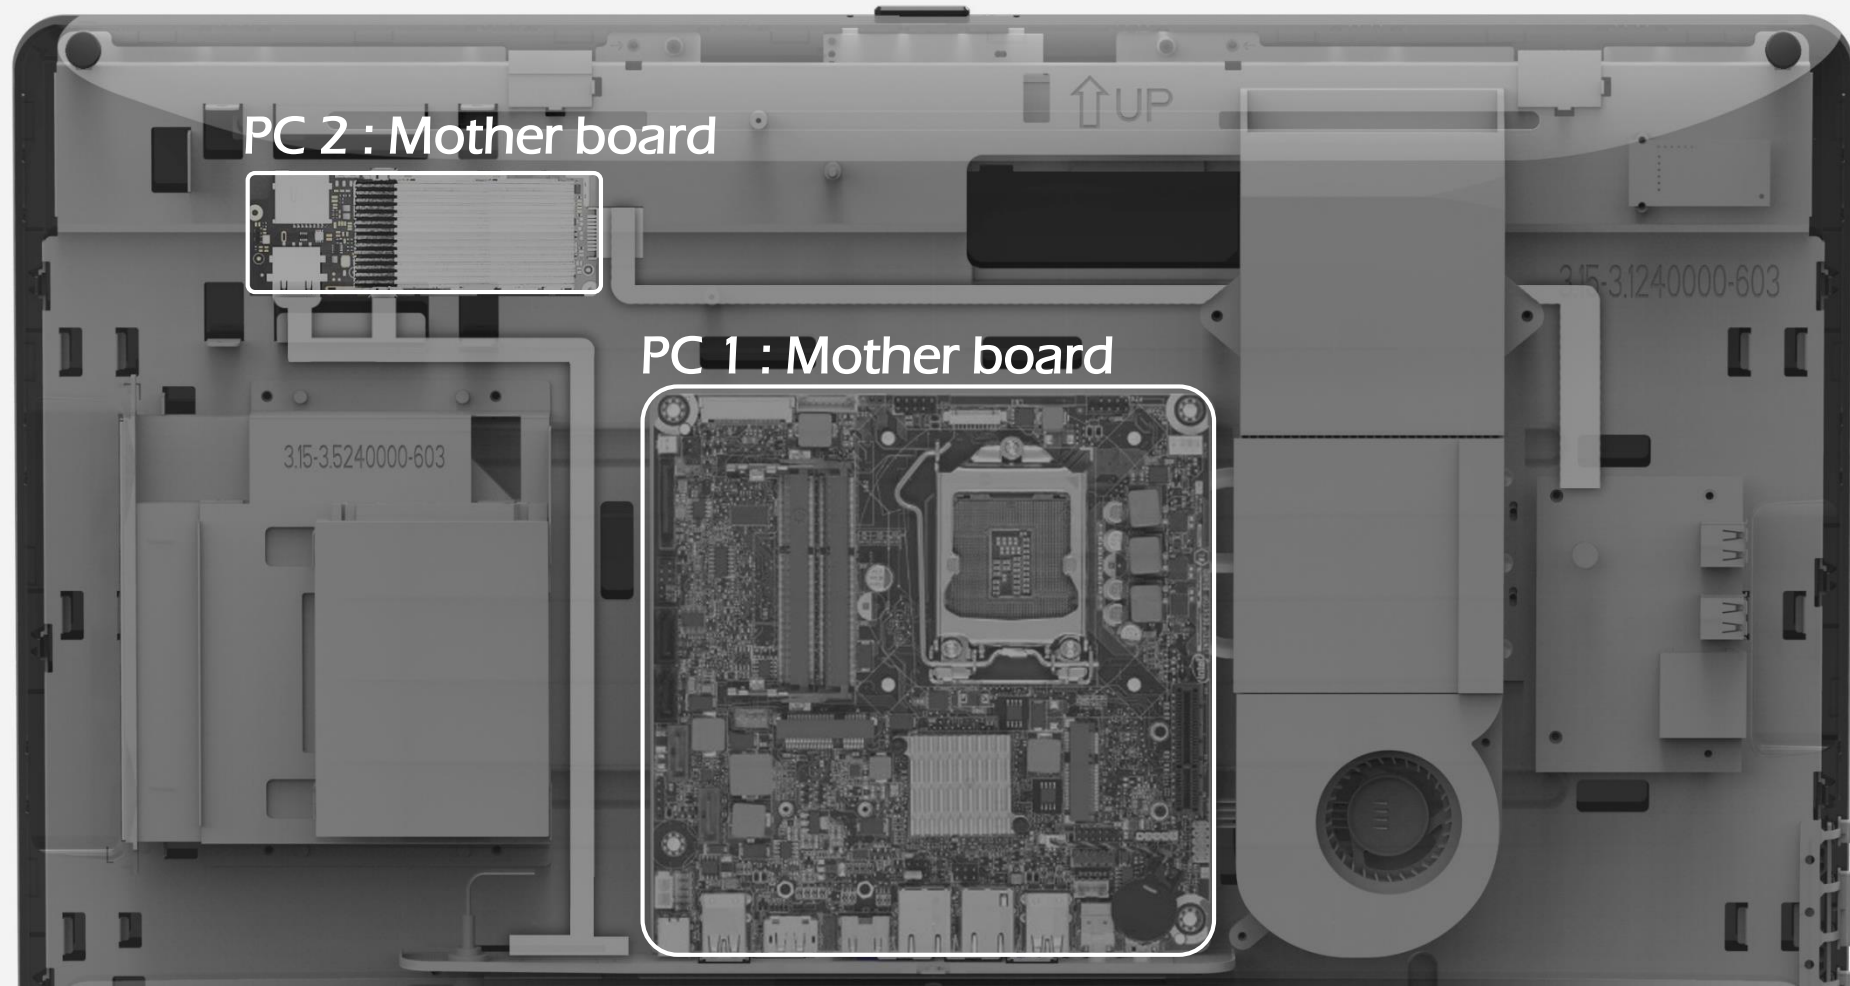

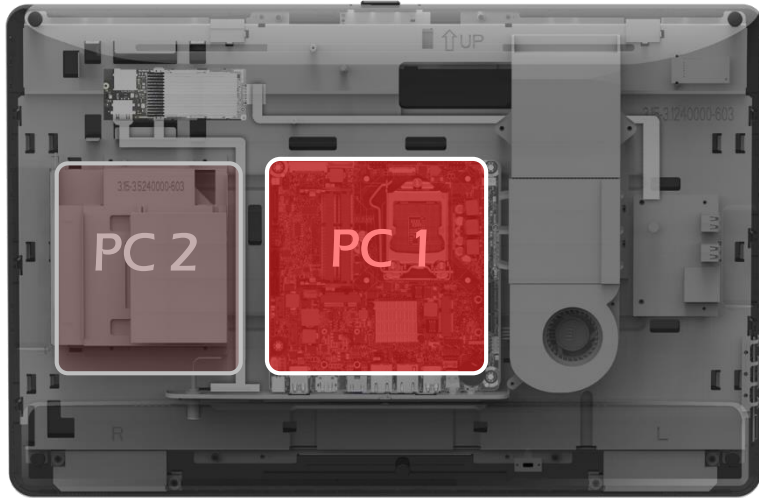


PC 1 Intranet  
More secure for your intranet data

Switch 2 different systems  
easily and immediately

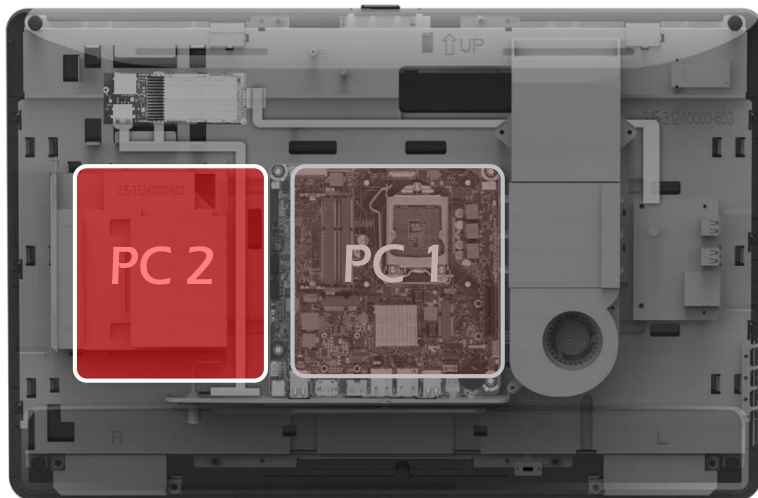


PC 2 internet  
Level up system Hardware security.

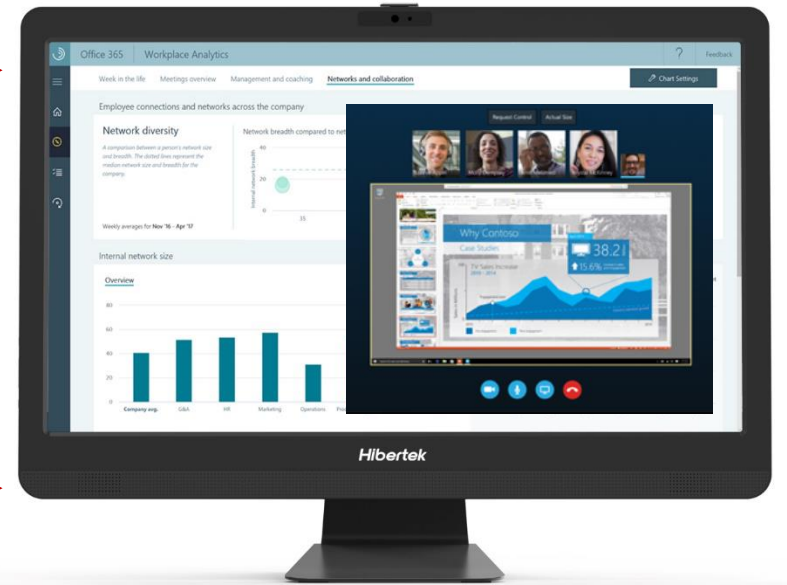



# VESA MOUNT

Put your AIO on the wall

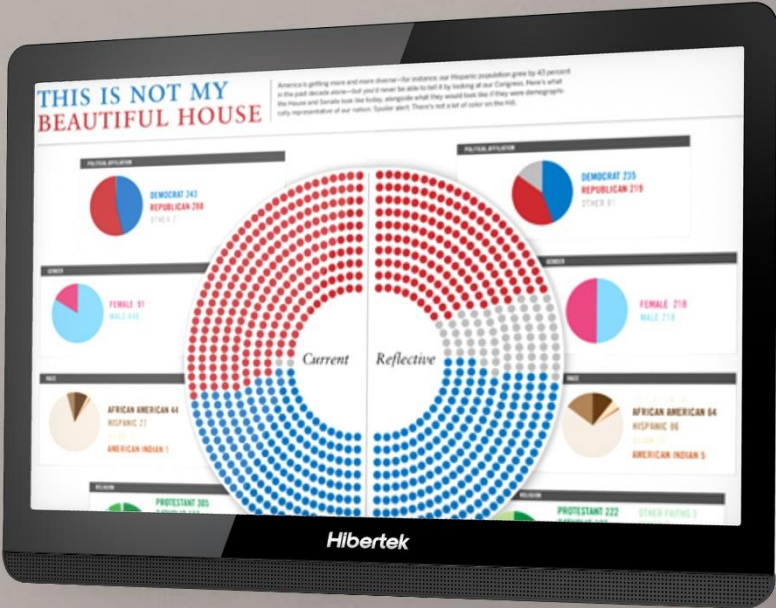



## Modern Industrial Aluminum Stand

- Cables Collection and Management makes AIO more beautiful.
- $-5^{\circ} \sim 90^{\circ}$  Hinge Adjustment for different user scenario.



45° Degrees  
Best View for the standing users



90° Degrees  
Almost Horizontal Side  
Easy Access for the motherboard IO PORTS

# Transformer Stand

Only 3 steps easily to change the Stand Style



L Form Stand

Remove the bottom & screws


Add the rubber

I Form Stand



## 3-way Rotation High Adjustable Stand

Change to high adjustable stand with standard VESA holes on back cover

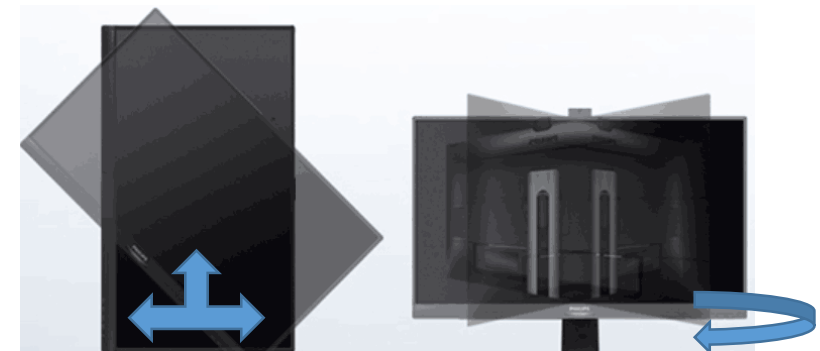

I-Stand  
Solid and Strong



Change the view  
You see more than others

Maximum stability for  
touch functionality.




## Professional Thermal Design

- Invisible Thermal Window
- Directed Air-Flow for continuous cooling
- Sufficient Air Input and Output for any Thin Mini-ITX CPU



Support ASUS,  
Gigabyte,  
ECS and  
ASROCK  
Motherboard

- 1.HDDx1 (x2 optional)  
\*T22/T23 only
- 2.ODD
- 3.LCD PCB
- 4.Speaker

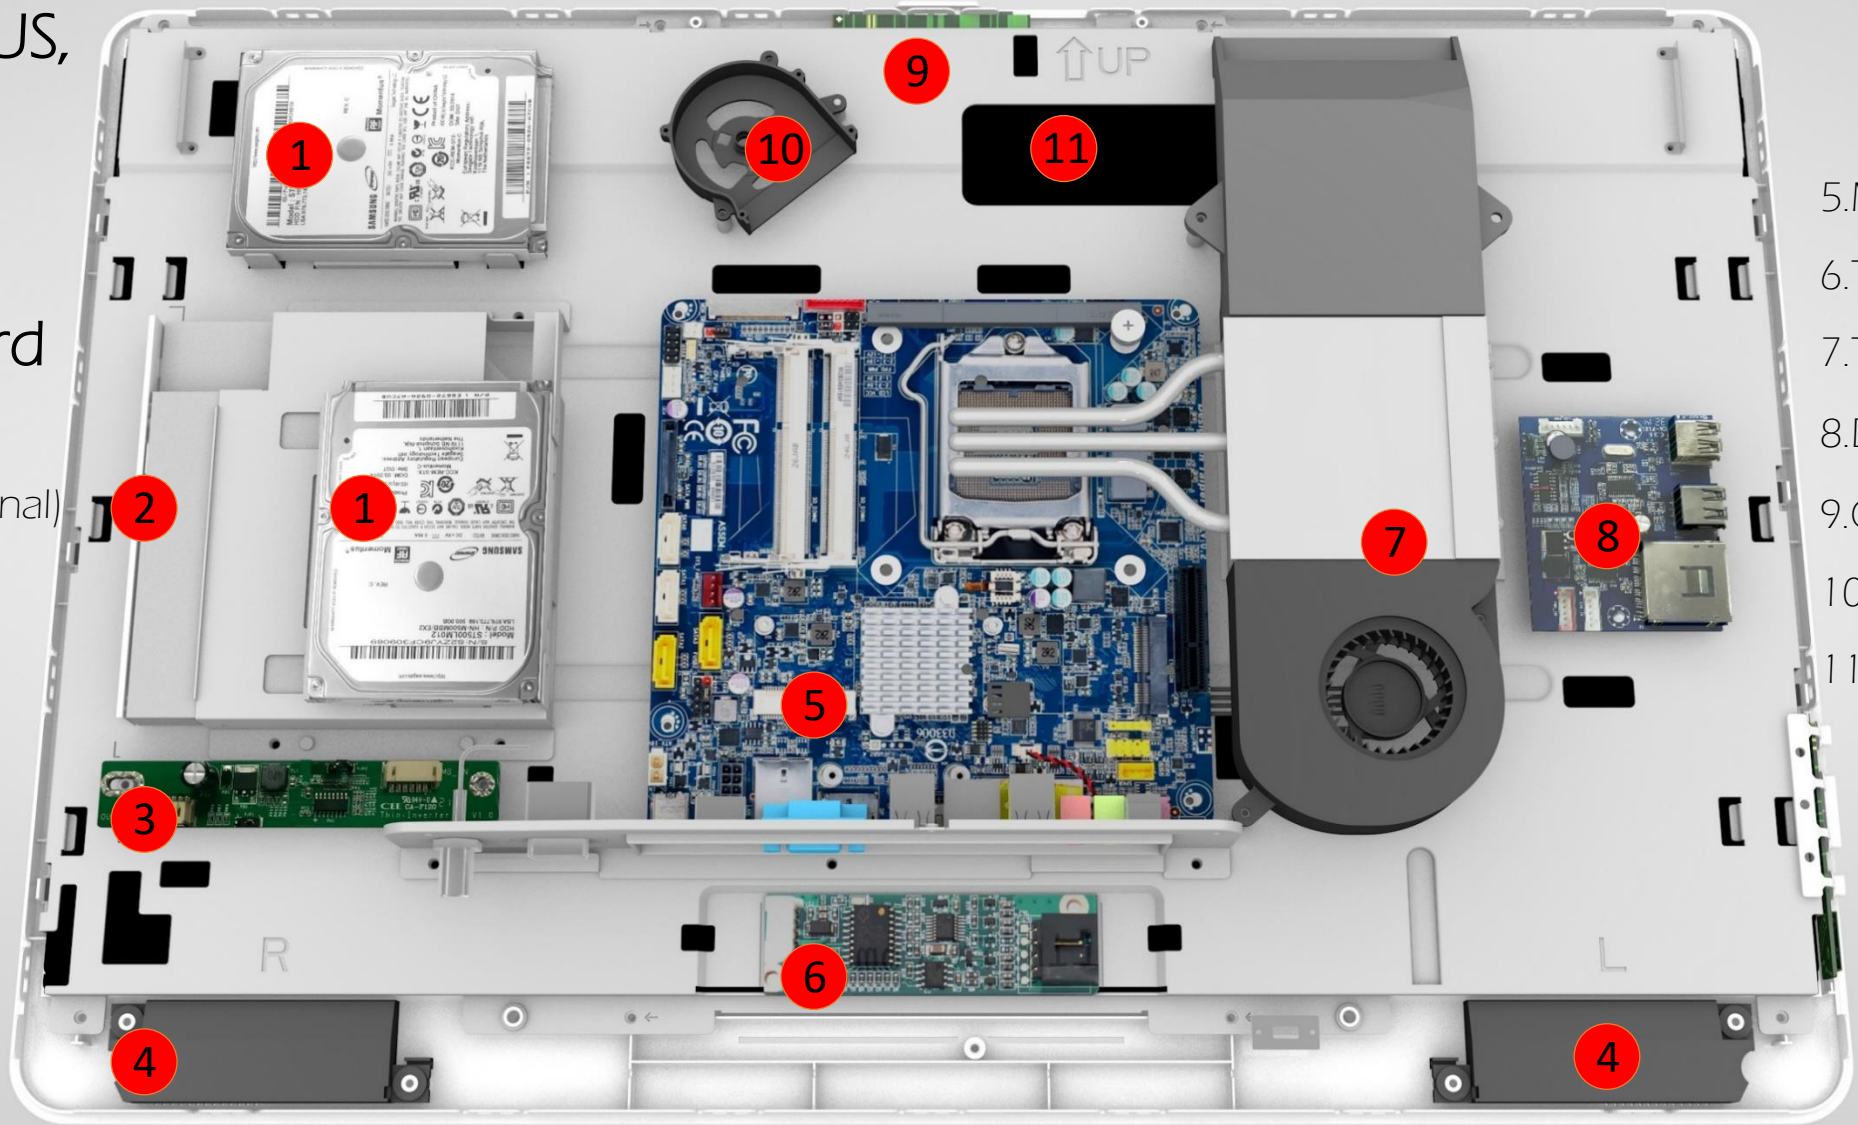

- 5.Motherboard
- 6.Touch Module
- 7.Thermal Module
- 8.Daughter Card
- 9.Camera Module
- 10.System Fan
- 11.Monitor

Professional Internal Placement and Easy Assembly

Model Name		T20	T22	T23
Size		19.5"	21.5"	23"
Dimension		473mm(L) x 387mm(H) x 200mm(D)	555mm(L) x 410mm(H) x 220mm(D)	555mm(L) x 410mm(H) x 220mm(D)
LCD		LED-backlight HD-1600(H) x 900(V) 250 nits Typical Brightness 5ms Response Time (Typ., on/off) 1000:1 Contrast Ratio	LED-backlight Full HD-1920(H) x 1080(V) 250 nits Typical Brightness 5ms Response Time (Typ., on/off) 1000:1 Contrast Ratio	LED-backlight Full HD-1920(H) x 1080(V) 250 nits Typical Brightness 5ms Response Time (Typ., on/off) 1000:1 Contrast Ratio
Motherboard		Supports Thin Mini-ITX Motherboard, Support AMD & Intel CPU up to 65W		
HDD		Supports 1x2.5" SATA HDD	Supports 2x2.5" SATA HDD	
Optical Drive		Supports 1x 12.7mm ODD		
I/O ports	Side L	2 x USB2.0 Ports 1x 4-in-1 Card Reader		
	Bottom	1 x COM port (optional)		
	Back IO	N/A (Depends on Motherboard Back I/O)		
Camera/ MIC		2M Camera/ MIC / Dual Array MIC (Optional)		
Wireless Data Network		1. Mini PCIe Wi-Fi (Optional) 2. Mini PCIe Wi-Fi/ Bluetooth (Optional)		
Speaker		2 x 3W (Optional)		
Adapter		120W Power Adaptor		
Color		Black / White		
Accessory		1 x Power Cable		

# Thin Mini AIO SPEC of L5


L5 = Chassis + adaptor + Speaker + LCD Panel

Color	Glass	Stand form
White & Black	Optional	L shape I shape

## Multi-touch screen

T20	T22	T23
Optional Under request	Optional	Optional

# Color Optional

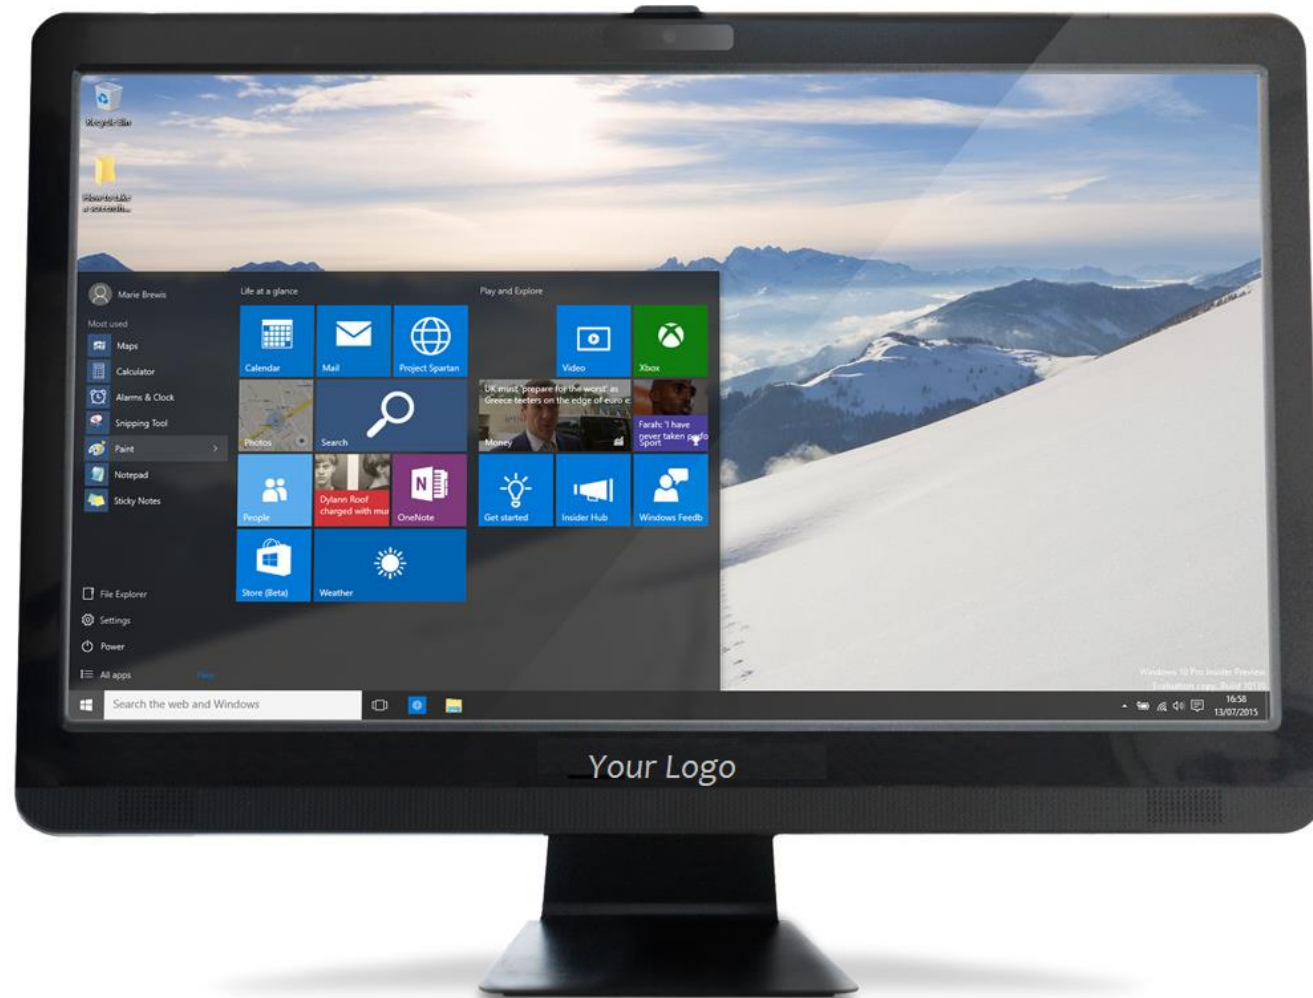

- Complete White
- Complete Black
- Complete Black Matt Painting
- Front Black Back White
- Front White Glass Cover
- Front Black Glass Cover

Customize your logo



T 20-G

LCD

Color

Glass

Stand form

19.5"

Black&White

Yes

L shape



T 22-G Black	LCD	Color	Glass	Stand form
	21.5"	Black	Yes	L shape



T 22-P Black

LCD

21.5"

Color

Black

Glass

Non

Stand form

L shape



T 23-P Black

LCD

23"

Color

Black

Glass

Non

Stand form

L shape



T 23-G Black

LCD

23"

Color

Black

Glass

Yes

Stand form

L shape





T 23-P White

LCD

Color

Glass

Stand form

23"

White

Non

L shape

# Our Best Service

Hibertek supports

L10

- Whole System (With OS or without OS)

L6

- Barebone with Motherboard (Without CPU, MEM, HDD, ODD)

L5

- Chassis without Motherboard (Without CPU, MEM, HDD, ODD)

SKD

- Chassis or some parts semi-assembled

CKD

- All knock down

Thank You!

***Hibertek***

International

[Sales@Hibertek.Com](mailto:Sales@Hibertek.Com)

[Information@Hibertek.Com](mailto:Information@Hibertek.Com)