

### Thin Mini ITX All In One

Professional R&D Service Provider



PART 01 Product Overview

CONTENTS

PART 02 User-Friendly Design

PART 03 Special Features

PART 04 Accessories

PART 05 Appendix





## **Product Overview**







# Space-Saving Figure









## 23.8" IPS Wide View Angle Display





# **User-Friendly Design**



### **Support 10-Point Capacitive Multi-Touch (Optional)**

For education & kiosk use







### **Support Windows Hello log in (Optional)**










#### Support Intel 9<sup>th</sup>-12<sup>th</sup> Generation Core™ i CPU

Support Desktop CPU Up to 65W



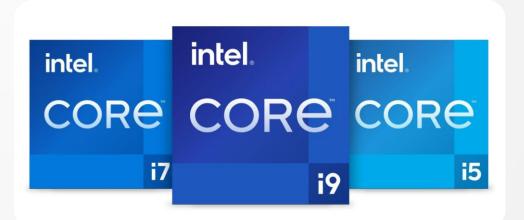





### Flexible With Any Brand of Motherboard

Support all standard Thin Mini-ITX motherboard



PRIME H610T/CSM



H110T







H110T-SI01



#### **GIGABYTE**

MDH11KI



**GA-H77TN** 



#### /ISRock

H110TM



Q1900TM-ITX





### Well-Organized Side I/O Ports



#### Expansion IO ports on left hand side



Audio Jacks (default) USB Type C (Optional)





## **Various Choices To Configure Your AIO**



Support 12.7mm/ 9.5mm ODD



**Support External HDD Tray** 



**Support Smart Card Reader** 







# **Special Features**



#### **Internal Power Board**

Support 120W / 90W / 60W Internal Power Board







### **Internal Battery**

Support 35W Desktop CPU Up to 30 Mins








### KVM - Dual system in one PC


Completely isolate Intranet and Extranet. Level up system hardware security.

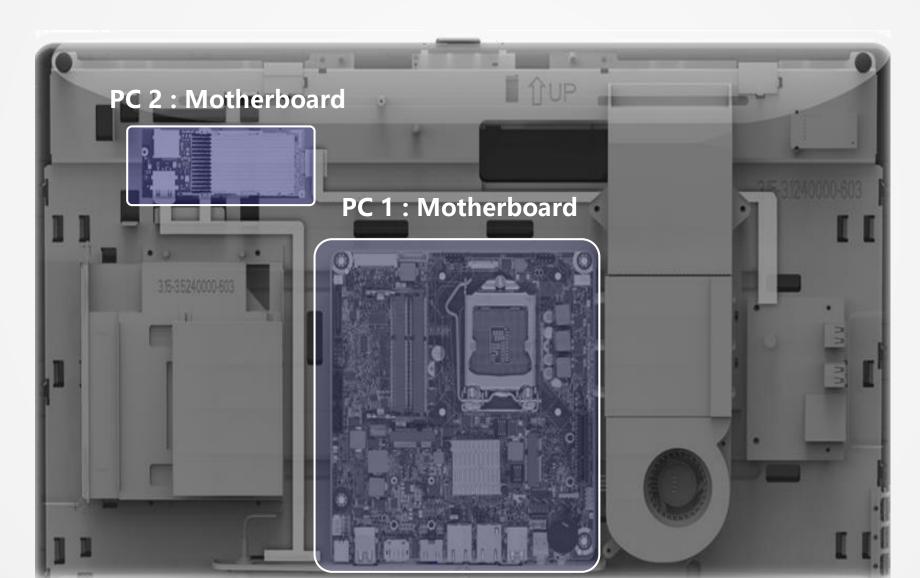






#### **KVM - Dual system in one PC**

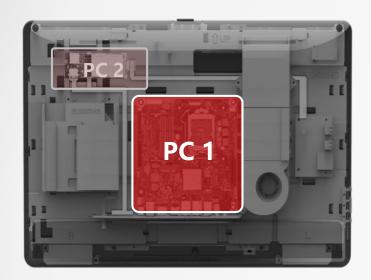

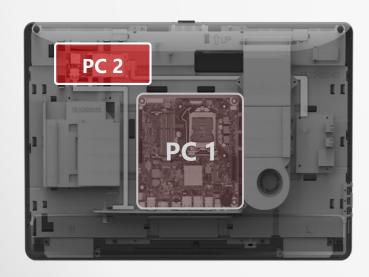

#### **PC 1 Intranet**

More secure for your intranet data

Switch 2 different systems easily and immediately



#### PC 2 internet

Level up system Hardware security.





### Camera, Microphone and Speaker

Anti-SPY camera curtain & LED detector with high quality speaker





## Accessories



## Stand Option— Height adjustable stand

ALL depends on your demand









Appendix



Display		23.8", LED-backlight, IPS Panel, FHD: 1920(H) x 1080(V), No bright dot
Dimension (W*H*D mm)		562.2mm x 369.9mm x 250mm (Round Stand) 562.2mm x 369.9 x 245mm (High Adjustable Stand)
CPU		Support Intel® for 12 <sup>th</sup> /11 <sup>th</sup> Generation Core™ i7/Core™ i5/Core™ i3/Pentium®/Celeron® Up to 65W desktop Processors and Pentium/Celeron SOC Processors
Camera/Mic		2M Camera/Mic
Speaker		2 x 3W Speakers
Memory		Support 2 x SO-DIMM
HDD		Support 2 x 2.5" HDD
ODD Bay		Optional
I/O Ports	Side	2 x USB2.0 or USB3.0 1 x 4-in-1 Card Reader 2 x Audio Jacks
		1 x USB Type C (Optional)
	Back	From motherboard
Chassis features		Chassis intrusion (Need to check MB has intrusion header)
Stand		2-in-1 Stand Option : High Adjustable Stand
Color		Black
VESA		YES
Kensington Hole		YES
Power Supply		120W Power Adaptor
Accessory		1 x Power Cable
OS		Windows 7, 8, 10, Linux, and Android  * Support OS version - depends on CPU and chipset driver





#### Our best service



L10

Whole System (With OS or without OS)

**L6** 

 Barebones with Motherboard (Without CPU, MEM, HDD, ODD)

**L5** 

 Chassis without Motherboard (Without CPU, MEM, HDD, ODD)

SKD

Chassis or some parts semi-assembled

CKD

All knock down







