




Intel® Xeon® D-1700 Processor



DDR4 2933MHz SODIMM

Top View

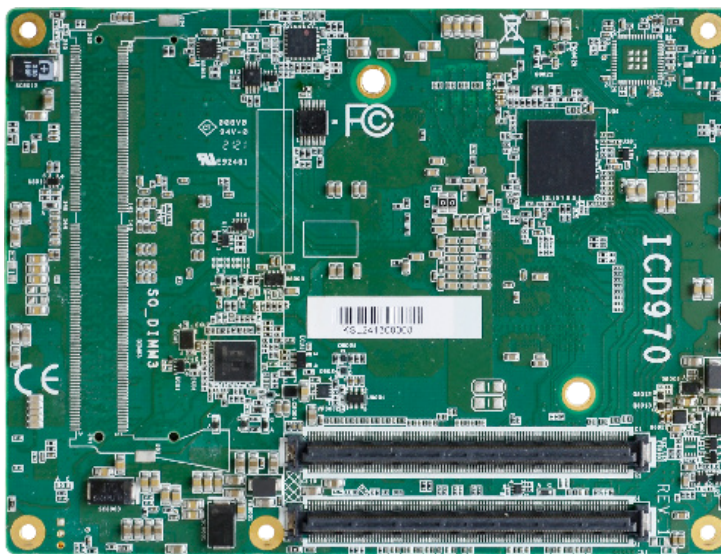

Bottom View

KEY FEATURES



DDR4

Dual DDR4 SODIMM
2933MHz up to 32GB
(ECC support)



Extended Temperature

Support extended operating temperature:
-40 to 85°C



10GBASE-KR

Support up to 4 x
10GbE Mac ports



Multiple Expansion


1 PCIe x16 (Gen4),
2 PCIe x8 (Gen3),
1 SMBus, 1 I²C, 1 LPC,
2 UART (TX/RX)




Rich I/O

2 Intel GbE, 4 USB 3.0,
4 USB 2.0, 2 SATA 3.0

BLOCK DIAGRAM

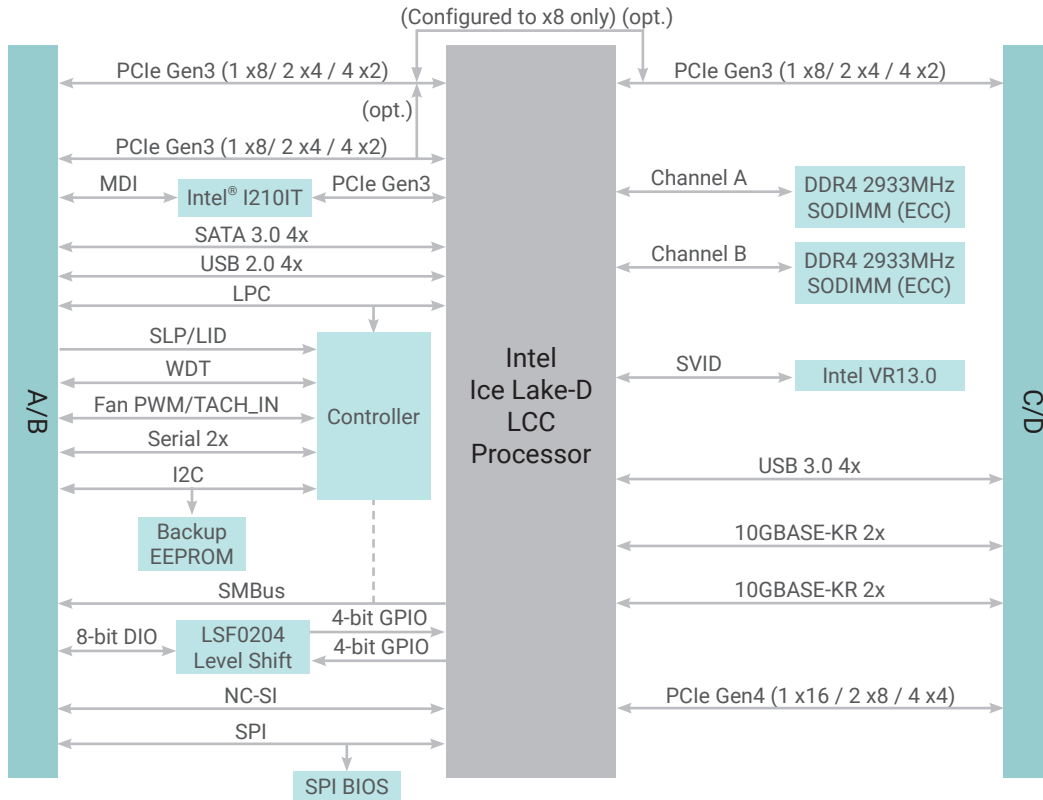

MECHANICAL DRAWING

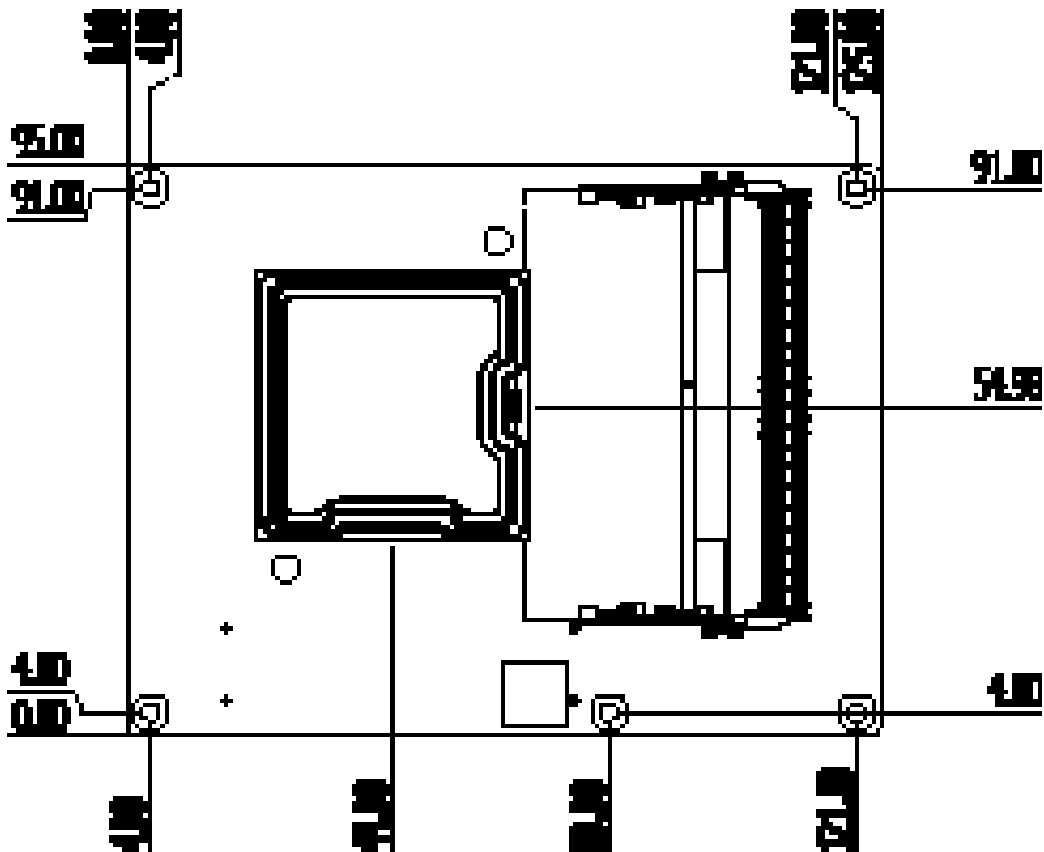

SPECIFICATION

SYSTEM	Processor	Intel® Xeon® D-1700 Processors Intel® Xeon® D-1746TER Processor, 10 Cores, 15MB Cache, 2.0GHz, 67W Intel® Xeon® D-1735TR Processor, 8 Cores, 15MB Cache, 2.2GHz, 59W Intel® Xeon® D-1732TE Processor, 8 Cores, 15MB Cache, 1.9GHz, 52W Intel® Xeon® D-1715ER Processor, 4 Cores, 10MB Cache, 2.4GHz, 50W Intel® Xeon® D-1712TR Processor, 4 Cores, 10MB Cache, 2.0GHz, 40W	
	Memory	Two 260-pin ECC SODIMM up to 32GB Dual Channel DDR4 2933MHz (Memory max speed depends on CPU SKU)	
	BIOS	Insyde SPI 128Mbit	
EXPANSION	Interface	Default: B1: 1 x PCIe x8 or 2 x PCIe x4 or 4x PCIe x2 (Gen 3) B2: 1 x PCIe x8 or 2 x PCIe x4 or 4x PCIe x2 (Gen 3) B3/B4: 1 x PCIe x16 or 2 x PCIe x8 or 4x PCIe x4 (Gen 4)	
		1 x LPC	
		1 x I ² C	
		1 x SMBus	
		2 x UART (TX/RX)	
ETHERNET	Controller	Supports up to 4 x 10GBASE-KR interfaces and max up to 4 x 10GbE MAC ports (maximum bandwidth 40Gb by activating the 4 x 10GbE at the same time) 1 x Intel® I210AT (10/100/1000Mbps) (0 to 60°C) or 1 x Intel® I210IT (10/100/1000Mbps) (-40 to 85°C)	
I/O	USB	4 x USB 3.0 4 x USB 2.0	
	SATA	2 x SATA 3.0 (up to 6Gb/s)	RAID 0/1
	DIO	1 x 8-bit DIO (4 in, 4 out)	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 15 to 255 Seconds	
SECURITY	TPM	Available upon request	
POWER	Type	12V, 5VSB, VCC_RTC (ATX mode) 12V, VCC_RTC (AT mode)	
	Consumption	Typical: 12V @ 1.24A (14.88Watt) Max.: 12V @ 2.26A (27.12Watt)	
OS SUPPORT	Windows	Windows Server 2012 Windows Server 2016	
	Linux	Yocto Project v1.8/v2.0	
ENVIRONMENT	Temperature	Operating: 0 to 60°C, -40 to 85°C	
		Storage: -40 to 85°C	
	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH	
MTBF	2180429 hrs @ 25°C; 1241904 hrs @ 45°C; 802692 hrs @ 60°C Calculation model: Telcordia Issue 4 Environment: GB, GC – Ground Benign, Controlled		
MECHANISM	Dimensions	COM Express® Basic	95mm (3.74") x 125mm (4.9")
	Compliance	PICMG COM Express® R3.0, Type 7	
STANDARDS AND CERTIFICATIONS	Certifications	CE, FCC, RoHS	

PACKING LIST

1 ICD970 board	
1 Cooler (Height: 47.80 mm)	TBD (0 to 60°C) TBD (-40 to 85°C)