


RLD-75

Intel® Raptor Lake(LGA1700 Socket) Processor based ATX
Motherboard with Z690/Q670/H670

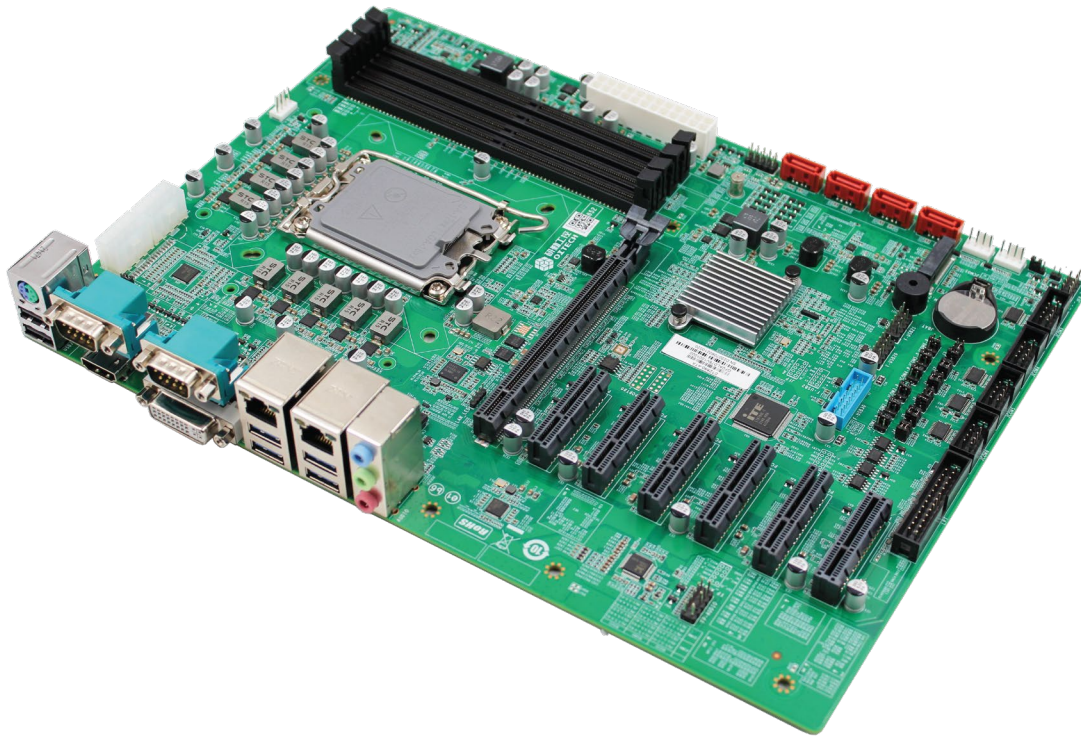

Features

- CPU: Intel® Raptor Lake Series LGA1700 Socket
- Memory: 4x UDIMM DDR4 Up to 128GB
- Display: Integrated Graphics display via HDMI+DVI-I(VGA)
- Ethernet Controllers: 1xIntel i219+1xIntel i226
- Storage: 1xM.2 for NVMe SSD, 4xSATA
- Expansion: 1*PCIe2X, 1*PCIe16X, 5*PCIe4X(Z690) or 4*PCIe4X(Q670/H670)
- Power: ATX_24PIN + 2*8PIN



IoT Solutions
Alliance

Industrial Solution
Builders Specialist

Maxtang®

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The RLD-75 ATX motherboard is based on the Intel Raptor Lake Desktop series processor with Z690/Q670/H670 Chipset, providing a complete PC platform with powerful performance. It supports dual displays in addition to four UDIMM DDR4 memory; features Intel i219 and i226 Ethernet controllers, up to 2.5GbE for high-speed communication. It has four SATA plus M.2 for storage; and a rich I/O interface that includes 6xCOM, 6 x USB2.0, 6 x USB3.2, and up to 7xPCIe for greater expansion.

The RLD-75 is an ideal solution for various industrial applications, it retains a robust design that can cope with extreme conditions. Our goal is to provide an excellent customer experience with a reliable product for more flexibility.



H/W Monitor



Watchdog




GPIO



Brightness

I/O Interfaces

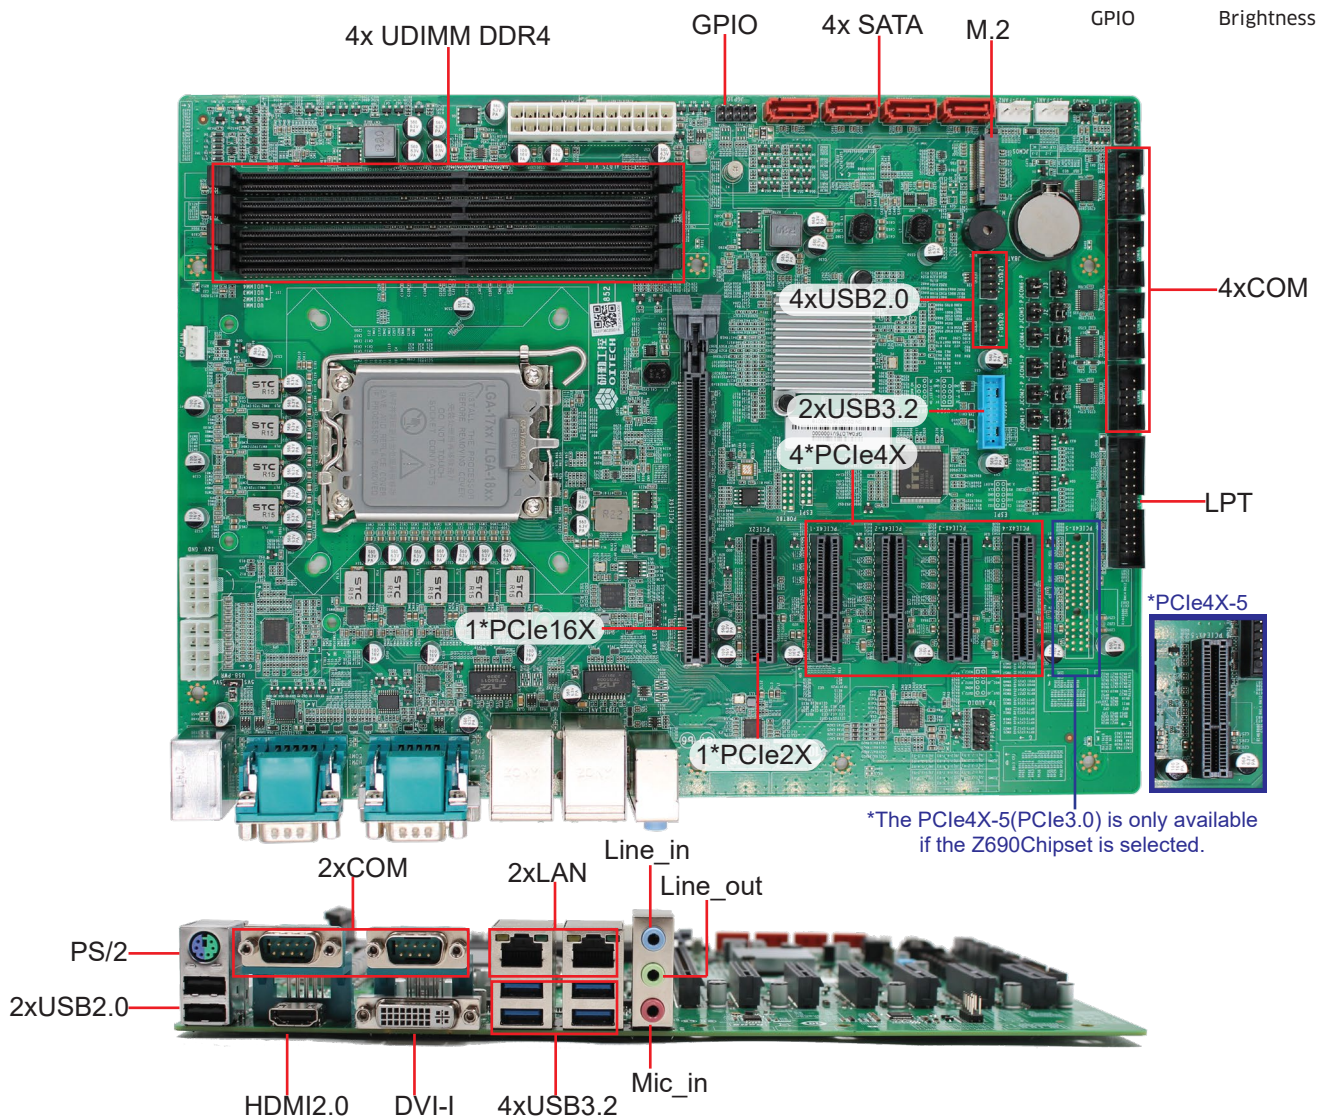


Technical Specifications

Processor	CPU	Intel® Raptor Lake Processor LGA1700	
	Chipset	Q670/H670/Z690	
Memory	Type	4x UDIMM DDR4-3200	
	Max Capacity	Up to 128GB	
Display	GPU	Intel® Integrated Graphics based on CPU	
	Port	1x HDMI +1x DVI-I(VGA)	
Ethernet	Controller	Intel® i219, Data Rate Per Port:1.0GbE	
		Intel® i226, Data Rate Per Port:2.5GbE	
	Interface	2x RJ45	
	Wake on LAN	Yes	
Audio	AMT	Yes. Intel® Active Management Technology. Only for selected models, varies on CPU.	
	TXT	Yes. Intel® Trusted Execution Technology. Only for selected models, varies on CPU.	
	Audio Codec	Realtek HD	
	Interface	1xLine-in+1xLine-out+1xMic-in,	
Hardware	CPU and system temperature, on-board voltage, watchdog		
Storage	SATA	4x SATA	
	M.2	1x M.2 for 2280 NVMe(PCIe4.0)/SATA SSD	
Expansion	PCIe5.0	1(PCIe16X)	
	PCIe4.0	3(PCIe4X-1,PCIe4X-3,PCIe4X-4)	
	PCIe3.0	2(PCIe2X, PCIe4X-2) if Q670/H670 Chipset is selected. or 3(PCIe2X, PCIe4X-2,PCIe4X-5,) if Z690 Chipset is selected.	
I/O Interface	LAN	2	
	COM	6xCOM: 6*RS232 default The COM5, COM6 can be set as RS485/RS422 by jumper	
	USB2.0	2x USB2.0 Ports+ 4x USB2.0 Header	
	USB3.2	4x USB3.2 Ports + 2x USB3.2 Header	
	HDMI2.0	1	
	DVI-I	1	
	Audio	1xLine-in + 1x Line-out + 1x Mic-in	
	PS/2	1 (for PS/2 keyboard and mouse)	
	GPIO	8-bit	
	LPT	1	
	TPM2.0	Optional	
	Dimension	Size	304.8mm x 218.44mm
		Board Type	ATX
Power	Standard Port	ATX_24PIN + 2*8PIN	
	Peripheral Input	For Fan and SATA (Compatible with 1150X)	
Temperature	Operating Temp.	0 ~ 60° C, depends on CPU speed and cooler solution	
	Storage Temp.	-40 ~ 85° C	
Operating System	Windows 10/11, Linux		

* All specifications and photos are subject to change without notice.

Functional Block Diagram

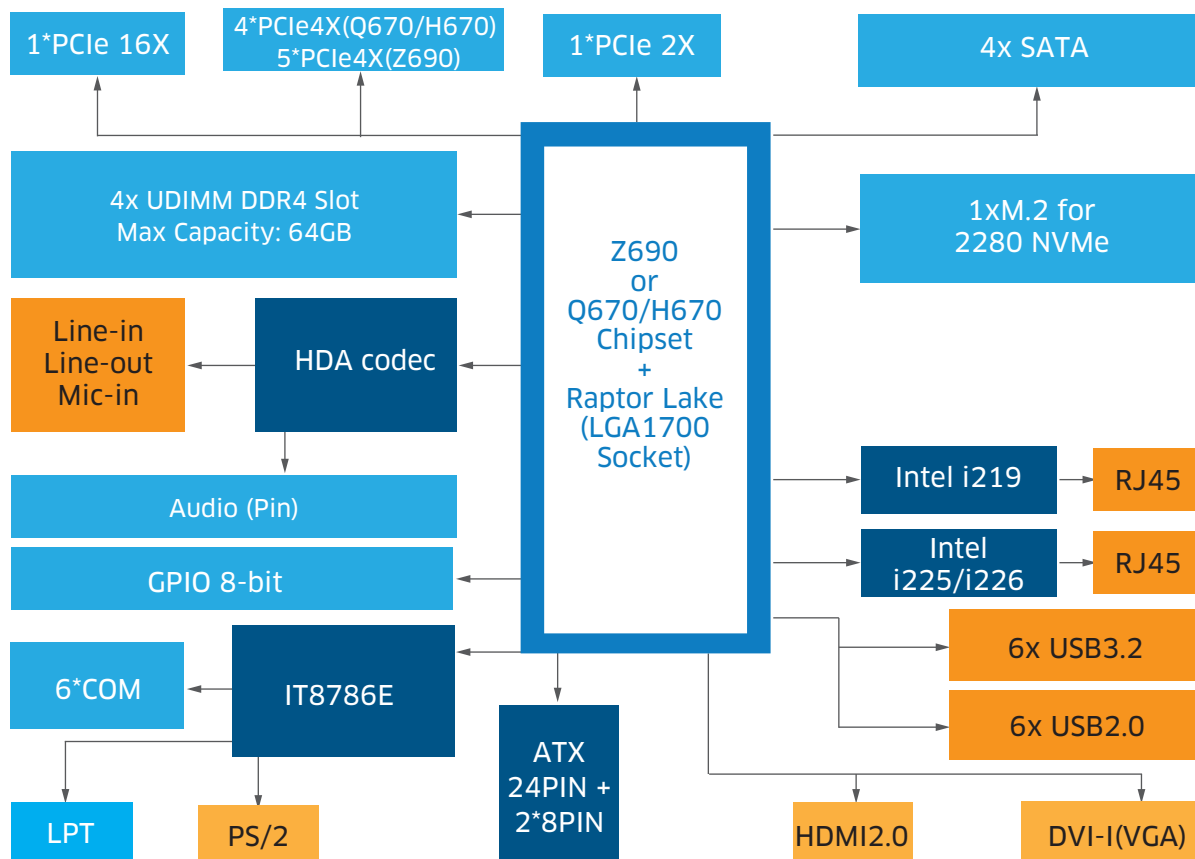

Order Information

Model Name	Description
DTZ690-ATX	DT Intel Z690 RLD75 ATX 2LAN(I219+I226) 6*COM HDMI+DVI-I 1xPCIE16X+1xPCIE2X+5xPCIE4X

*For customized options, please consult regional sales. And please confirm the model name and description before purchasing. *The model name and description might vary due to inventory changes.



Copyright © 2023 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.