

SYS-60415W

Tower server

SYS-60415W-S08 is a high-performance Intel® workstation W790 chipset. High-performance single-channel tower server with Sapphire Rapids series W2400/W2500 Processor 64L and W3400/3500 Processor 112L processors.




- Intel Sapphire Rapids W7-3455/3445,W5-3425/2455X, W3-2435/2425
- 8 x DDR5 RDIMM Slot,
- DDR4 3DS RDIMM, RDIMM; Max support 4800MHz, 2TB
- 3 x PCI-E 5.0 x16, 3 x PCI-E 4.0 x8, 1 x PCI-E 4.0 x8 (In X16 slot)
- 2 x 3.5inch SSD and 1 x 2.5inch SSD,
- Intel®W790 Chipset, Support Raid 0, 1, 5, 10, (8 x 7PIN SATA) ;
Optional array card, Support RAID0/1/10/5/6/50/60/1E
- 2 x Intel®2.5G LAN,1 network port management port

产品规格 Specifications


Processor	CPU	Intel Sapphire Rapids W7-3455/3445,W5-3425/2455X, W3-2435/2425
	Chipset	Intel®W790
Memory	Type	8 x DDR5 RDIMM Slot; 64L CPU support DIMMA1/DIMMB1/DIMME1/DIMMF1; DDR4 3DS RDIMM, RDIMM; Max support 5600MHz, 2TB
	I/O	1 x VGA
Memory	SATA	2 x 3.5inch SSD and 1 x 2.5inch SSD, Intel®W790, Support Raid 0, 1, 5, 10, (8 x 7PIN SATA) Optional array card, Support RAID0/1/10/5/6/50/60/1E
	M.2	2 x M.2 2280, Support PCI-E 4.0 x4
Network	Controller	Support 10/100/1000/2500Mbps, Intel i226LM Enterprise Gigabit network controller
	Interface	2 x RJ-45 2.5GbE LAN
I/O	Rear I/O	1 x VGA, 1 x COM, 1 x IPMI management interface, 1 x UID switch (LED) ; 1 x type-C, 2 x USB 2.0, 5 x USB 3.0, 2 x RJ45 2.5GbE LAN,1 x 8 Channel audio interface,
	Onboard I/O	2 x USB 3.0 pin , 1 x USB3.0 Type A
COM	COM	1 x standard DB9
Extension	PCIe	3 x PCI-E 5.0 x16, 3 x PCI-E 4.0 x8, 1 x PCI-E 4.0 x8 (In X16 slot) 64L CPU support PCIE SLOT1/3/5/7
Front Panel	Switch	1 RESET,1 POWER
	LED	1 x POWER
Power	Input	Support CRPS 1+1 redundant power supply, 800W/1200W/1600W, etc. Support the ATX power supply, optional 800 w / 1000 w / 1300 w, etc
SIZE		500*174.5*435mm
Temperature and Humidity	Working Temperature	0°C to 40°C
	Working Humidity	8% ~90% non-condensing
	Storage Temperature	-40°C to 70°C
	Storage Humidity	5%~95% non-condensing
System	OS	Win10 x64, Win11 x64, Linux (ubuntu22.04)

02 产品图示 Product view

Front I/O

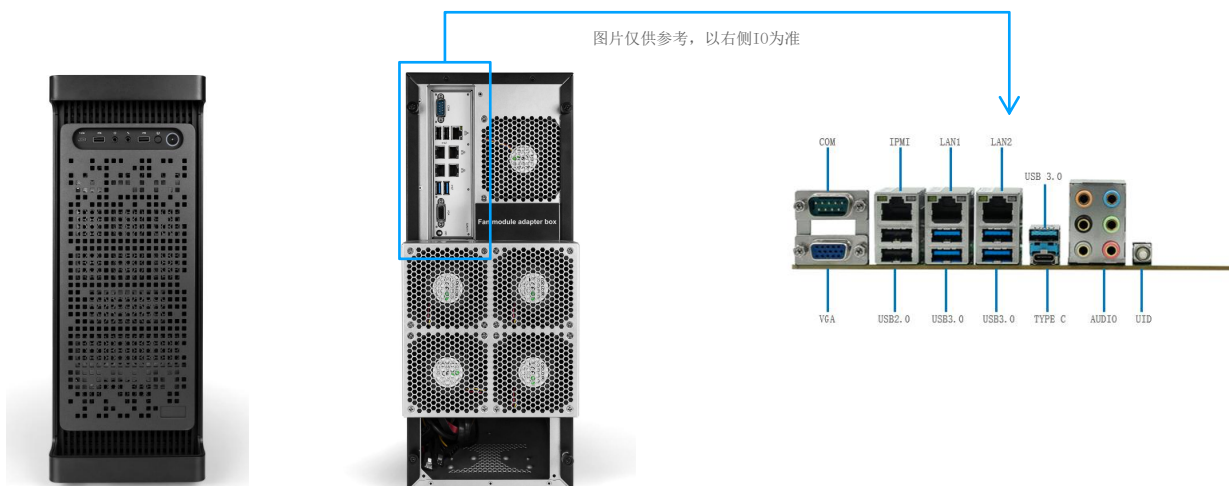

03 产品尺寸 Dimensions

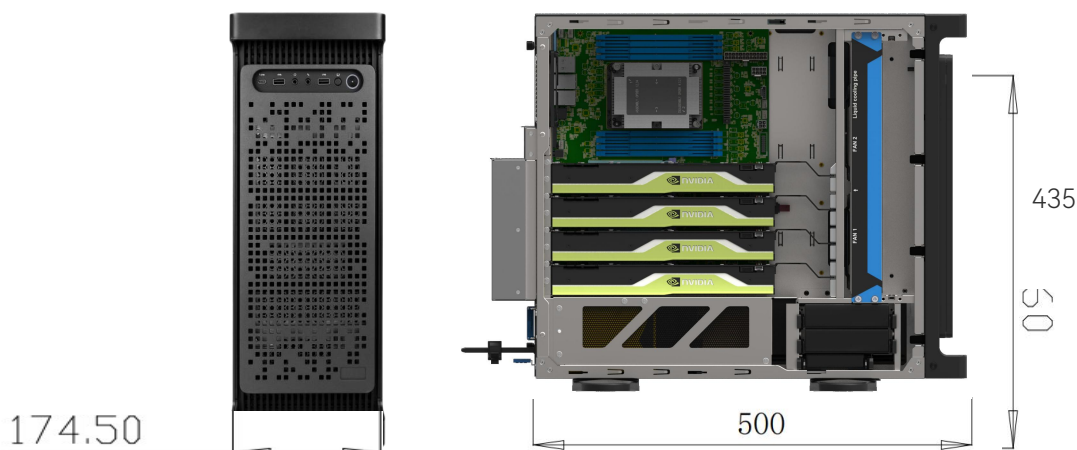

04 产品选型 Product Selection

Model	Disposition
SYS-60415W-S850	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 850W Single Power, Standard system
SYS-60415W-S1000	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 1000W Single Power, Standard system
SYS-60415W-S1600	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 1600W Single Power, Standard system
SYS-60415W-R800	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 800W Redundant Power, Standard system
SYS-60415W-R1200	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 1200W Power, Standard system
SYS-60415W-R1600	P15SWA-BMC, 1 x Intel W2400/W3400(64L);W3400/W3500(64L), 8DIMM DDR5 RECC, 2 x 2.5G LAN, IPMI, 1600W Power, Standard system