

1. Product SPEC

Product Model

B00TM2




System Physical Standard Configuration		
Type	Details	Descriptions
Product Form	Form Factor	Mini PC
	Dimension(L x W x H)	180mm*180mm*36mm
	Volume	< 1.2L
	Security	Kensington
		Padlock
	Colour	Black and Gray
	Weight(g)	About 1300g
Material	House	Metal
System Hardware Configuration		
Type	Details	Descriptions
Platform	Intel	Intel® Processor
CPU	Processor Type	Intel® Tiger Lake
	Process	i3 1115G4, i5 1135G7, i7 1165G7
	TDP	28W
	Processor Graphics	Intel® UHD Graphics
	Cache	6 MB Intel® Smart Cache (i3 1115G4) 8 MB Intel® Smart Cache (i5 1135G7) 12 MB Intel® Smart Cache (i7 1165G7)
Memory	Technology	2*SO-DIMMDDR4 3200MT/s
	Memory	8GB, 16GB, up to 64GB
Storage	EMMC	N/A
	SSD	M.2 2280 NVME/NGFF, Max 2TB, sata3.0 or PCIe*4
	HDD	2.5 inch 500GB/1T/2T
Communication Port	WIFI/Bluetooth	AC WIFI or WIFI 6
	Protocol	PCIE& CNVI

Version No.: V1.0

I/O	Front	USB 3.2GNE1(Type A)	X2, Type A
		Type-C	x1, USB2.0 Data Only/DP + USB3.0（Optional）
		Audio-in	x1
		Audio-out	x1
		Power Button	x1
	Back	USB 3.2GNE1(Type A)	X1, Type A
		USB 2.0(Type A)	X3, Type A
		HDMI	X1, standard HDMI out, 4096x2160@60Hz
		DP	X1, standard DP out, 4096x2160@60Hz
		VGA	X1, Max. resolution: 2048x1536@60Hz
		LAN(RJ45)	x1, 10M/100M/1000M
		DC IN	x1, ⌀5.5mm
		Antenna	x2, internal antenna *1, external antenna*1
Audio	Audio in		x1
	Audio out		x1
	D-mic		N/A
	Speaker (Optional)		2W*1
TPM	HW (Optional)		Support
	SW		Support TPM 2.0
Hot key	Power Button		x1
LED	Power		x1, power on: Blue light always on; sleeping mode: Blue light flashing; power off: Blue light off;
	SSD/HDD		x1, Read/write: Red light flashing;
Power	AC adapter		AC 100~240V, 50/60Hz,19V/3.15A, ⌀5.5
Battery	RTC Battery		RTC 2032
Software Configuration			
Software	Support OS		Windows 11/Linux

2. I/O Interface

Front

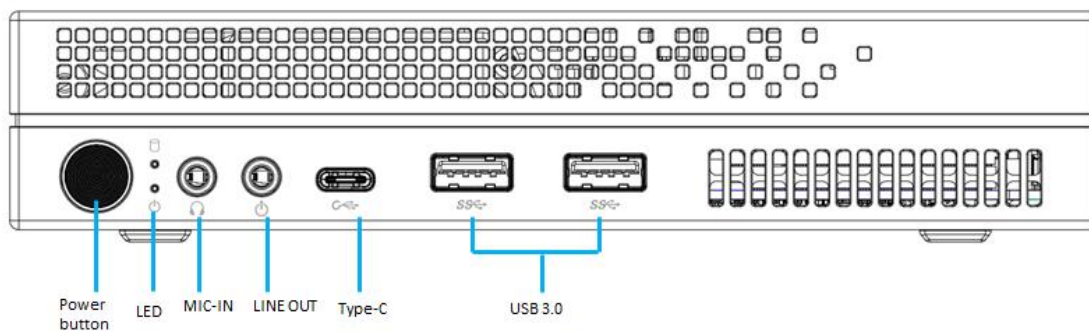

Back

